

12000LB HYDRAULIC WINCH BUILT FOR TOUGH **INDUSTRIAL USE**



PRO

Hydraulic Performance

Performance Specifications:


Based on wire cable 9.5mm diameter with a breaking strain ≥10 Tonne.

| Layer | Line Pull | | Line Speed | | Wire Rope Capacity | |
|-------|-----------|--------|------------|---------|--------------------|--------|
| | Lbs | (Kg) | Ft/Min | (m/Min) | Ft | (m) |
| 1 | 12000 | (5443) | 29.53 | (9) | 21 | (6.4) |
| 2 | 9818 | (4453) | 36.09 | (11) | 46.92 | (14.3) |
| 3 | 8307 | (3768) | 42.65 | (13) | 77.73 | (23.6) |
| 4 | 7200 | (3266) | 49.21 | (15) | 112.53 | (34.3) |

TMACHWPRO12000 Features & Specifications:

| | |
|------------------------------|---|
| Rated Line Pull | 12000Lb (5443Kg) Single Line |
| Rated Pressures | 16 MPA |
| Maximum Input Flow | 60 Litres/Min |
| Hydraulic Motor Displacement | 80 CC/R |
| Gear Ratio | 23:1 |
| Weight | 187Lb (85kg) |
| Standard Compliance | CE |
| Hydraulic Fluid Connection | 2xG1/2"(oil in); 1xG1/4 (oil out) |
| Overall Dimensions | (LxWxH) 32.28" x 15.00" x 9.37" (820 x 381 x 238mm) |
| Mounting Bolt Pattern | 339mm x 120mm; 339mm x 170mm |
| Fairlead | 4-Way Roller Fairlead |
| Finish | Black and Yellow |

Professional Performance Industrial Hydraulic Winch

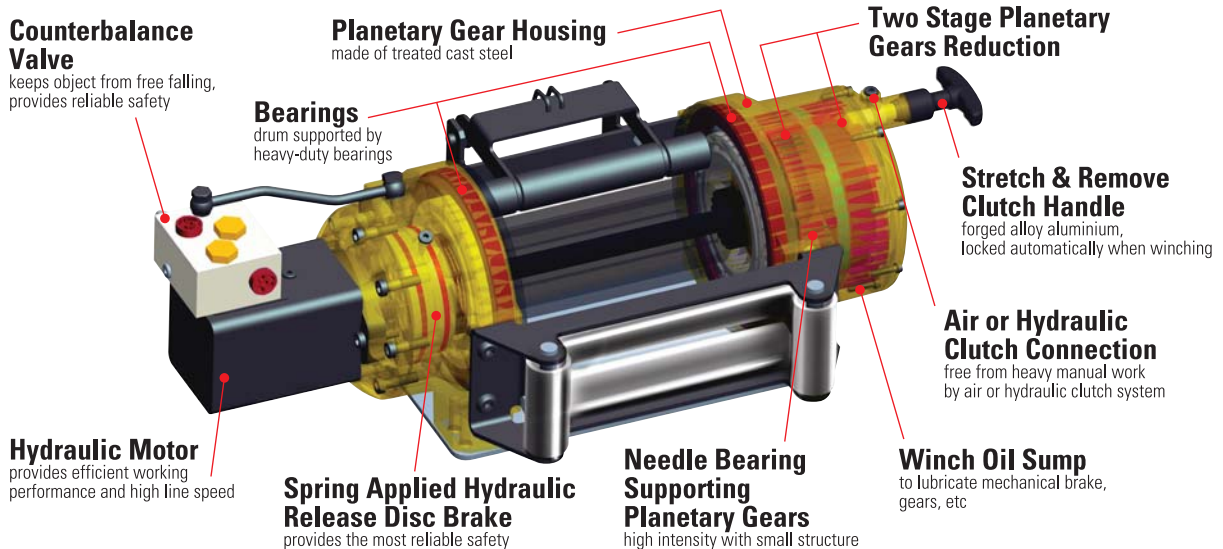

REPLACEMENT PARTS ARE AVAILABLE FOR ALL WINCH MODELS.