

15000LB HYDRAULIC WINCH BUILT FOR TOUGH **INDUSTRIAL USE**



PRO

Hydraulic Performance

Performance Specifications:


Based on wire cable 10.5mm diameter with a breaking strain ≥10 Tonne.

Layer	Line Pull		Line Speed		Wire Rope Capacity	
	Lbs	(Kg)	Ft/Min	(m/Min)	Ft	(m)
1	15000	(6804)	22.97	(7)	19.03	(5.8)
2	11956	(5423)	28.87	(8.8)	42.65	(13)
3	9940	(4509)	34.45	(10.5)	72.18	(22)
4	8505	(3858)	40.35	(12.3)	104.99	(32)

TMACHWPRO15000 Features & Specifications:

Rated Line Pull	15000Lb (6804Kg) Single Line
Rated Pressures	16 MPA
Maximum Input Flow	60 Litres/Min
Hydraulic Motor Displacement	100 CC/R
Gear Ratio	23:1
Weight	194Lb (88kg)
Standard Compliance	CE
Hydraulic Fluid Connection	2xG1/2"(oil in); 1xG1/4 (oil out)
Overall Dimensions (LxWxH)	32.48" x 15.00" x 9.37" (825 x 381 x 238mm)
Mounting Bolt Pattern	339mm x 120mm; 339mm x 170mm
Fairlead	4-Way Roller Fairlead
Finish	Black and Yellow

Professional Performance Industrial Hydraulic Winch

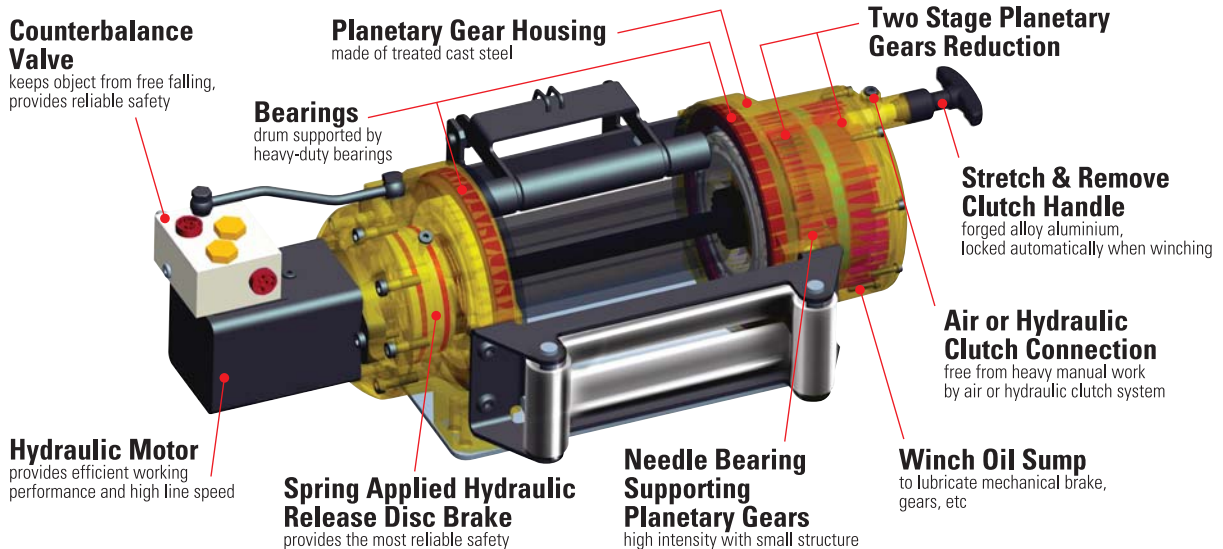

REPLACEMENT PARTS ARE AVAILABLE FOR ALL WINCH MODELS.